

Seewarte Formation

SUSANNE M.L. POHLER, KLAUS BANDEL, ERIKA KIDO, MONICA PONDRELLI, HANS-PETER SCHÖNLAUB,
LUCA SIMONETTO & THOMAS J. SUTTNER

Österreichische Karte 1:50.000
Blatt BMN 197 Kötschach

Carta Topografica d'Italia 1:50.000
Foglio 018 Passo di Monte Croce Carnico

Blatt UTM 3109 Oberdrauburg

Definition

Dark gray fossiliferous limestone (wackestone to rudstone/grainstone) slightly dolomitic in places.

Description

The Seewarte Formation consists of dark gray (presumably bituminous) wackestone, grainstone and rudstone. In some segments appear yellowish (dolomitic) laminated or nodular textures. Gastropods are common macrofossils. Bioclasts of corals, stromatoporoids, algae, bivalves, crinoids are frequent components.

Fossil content


Brachiopods, calcareous algae, cephalopods (nautiloids), crinoids, dactyloconarids, gastropods, ostracods, sponge spicules, trilobites.

Depositional environment

The dark gray fossiliferous limestones of the Seewarte Formation were deposited in shallow subtidal water with sufficient aeration to support the rich fauna with abundant large gastropods, stromatoporoids and corals. Dolomitic laminae and dark colour are suggestive of restriction and possibly anoxia in sub-bottom sediments.

Stratotype

Seewarte section (JHAVERI, 1969), at the base of Mt. Seewarte near Rifugio Lambertenghi-Romanin, at coordinates N 46°36'30", E 12°52'14".

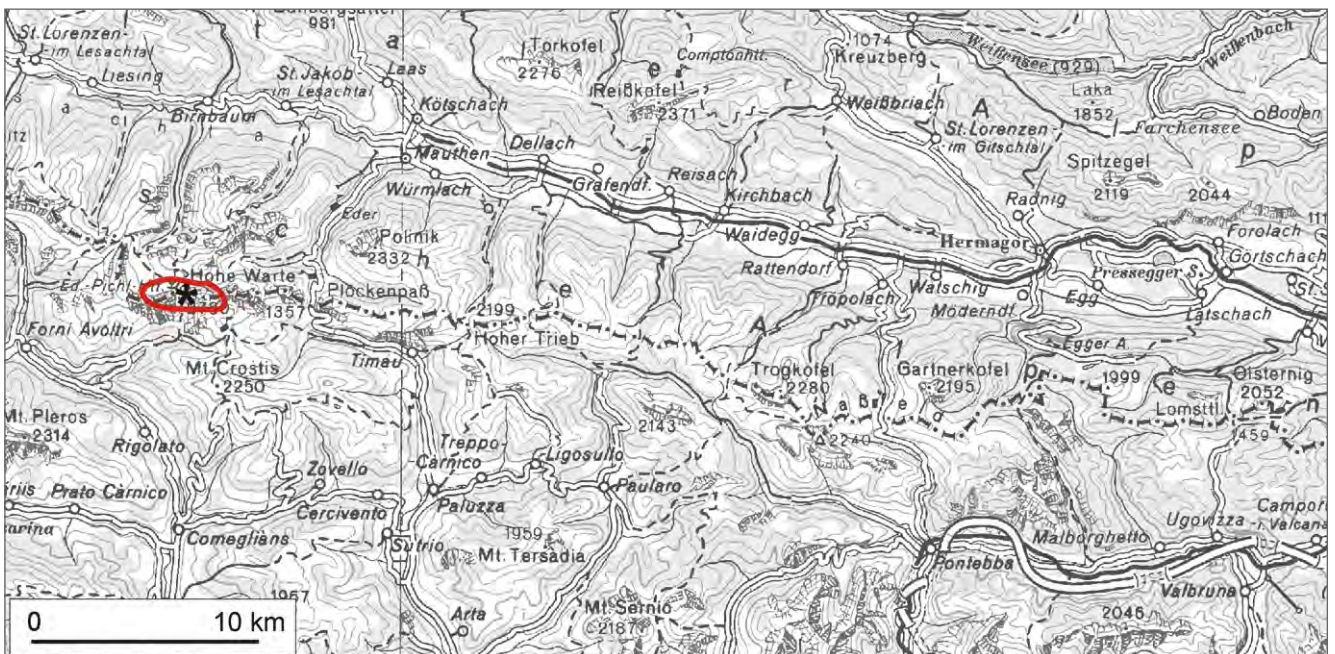

Areas of outcrop of the Seewarte Formation with indication of the stratotype (asterisk).



The Seewarte Section. a) simplified log of the Seewarte Formation; b) view of Mt. Seewarte with the dark band of the Seewarte Formation (dashed white line) above the Hohe Warte Formation and below the Lambertenghi Formation. The red line depicts a fault. The continuation of the Seewarte limestone towards the peak of the mountain is not visible in this image (photo H.P. SCHÖNLAUB).

Reference sections -

Type area

Central Carnic Alps.

Main outcrop areas

The Seewarte Formation crops out mainly in Lake Wolayer area at Mts. Hohe Warte, Seewarte and Seekopf.

Thickness

About 40 m.

Boundaries

Underlying units – Hohe Warte Formation (conformable gradual contact).

Overlying units – Lambertenghi Formation (conformable gradual contact).

Lateral units – Polinik Formation, Kellerwand Formation.

Derivation of name

After Mt. Seewarte where type section is located.

Synonymy

Riffkalk-Facies der Stockwerke H-G-H [partim]: STACHE (1884).

Schwarzer Gastropodenkalk: GAERTNER (1931).

Schwarze Kalke mit ihrem reichlichen Vorkommen von Hercynellen: GAERTNER (1931).

Gastropodenkalke: HERITSCH (1943).

Hercynellen-führende Gastropodenkalke: ERBEN et al. (1962).

ZONA A *HERCYNELLA*: SELLI (1963).

Seewartekalk: JHAVERI (1969).

Hercynellenkalk: SCHÖNLAUB & FLAJS (1975); KREUTZER (1990).

Seewarte-Kalk: KREUTZER (1992).



Views of the Seewarte Formation in the field. a) large gastropods are characteristic of the Seewarte Formation (photo H.P. SCHÖNLAUB); b) euomphalid gastropod from near the top of the unit (photo T.J. SUTTNER).

Chronostratigraphic age

Devonian: Lower Emsian (ERBEN et al., 1962; KREUTZER, 1990: 295; SCHÖNLAUB et al., 2004: 12).

Biostratigraphy -

Complementary references -

Remarks -

References

- ERBEN, H.K., FLÜGEL, H. & WALLISER, O.H. (1962): Zum Alter der Hercynellen führenden Gastropoden-Kalke der zentralen Karnischen Alpen. – II. International Symposium Silur/Devon, 71–79, Stuttgart.
- GAERTNER, H.R. von (1931): Geologie der Zentralkarnischen Alpen. – Denkschrift der Österreichischen Akademie der Wissenschaften, mathematisch-naturwissenschaftliche Klasse, Abteilung 1, **102**, 113–199, Wien.
- HERITSCH, F. (1943): Die Stratigraphie der geologischen Formationen der Ostalpen. Das Paläozoikum. – 681 p., Berlin (Borntraeger).
- JHAVERI, R.B. (1969): Unterdevonische Gastropoden aus den Karnischen Alpen. – *Palaeontographica*, Abteilung A, **133**, 146–176, Stuttgart.
- KREUTZER, L.H. (1990): Mikrofazies, Stratigraphie und Paläogeographie des Zentralkarnischen Hauptkammes zwischen Seewarte und Cellon. – *Jahrbuch der Geologischen Bundesanstalt*, **133/2**, 275–343, Wien.
- KREUTZER, L.H. (1992): Palinspastische Entzerrung und Neugliederung des Devons in den Zentralkarnischen Alpen aufgrund von neuen Untersuchungen. – *Jahrbuch der Geologischen Bundesanstalt*, **135/1**, 261–272, Wien.
- SCHÖNLAUB, H.P. & FLAJS, G. (1975): Die Schichtfolge der Nordwand der Hohen Warte (Mt. Coglians) in den Karnischen Alpen (Österreich). – *Carinthia II*, **165/85**, 83–96, Klagenfurt.
- SCHÖNLAUB, H.P., HISTON, K. & POHLER, S. (2004): The Palaeozoic of the Carnic Alps. – In: SCHÖNLAUB, H.P. (ed.): *Field Trip Carnic Alps Guidebook*. June 23–24, 2004, Carinthia, Austria. – *Geologische Bundesanstalt*, 2–32, Wien.
- SELLI, R. (1963): Schema geologico delle Alpi Carniche e Giulie occidentali. Scala 1:100.000. – *Giornale di Geologia*, **30**, 1–136, Bologna.
- STACHE, G. (1884): Über die Silurbildungen der Ostalpen nebst Bemerkungen über die Devon-, Carbon- und Permschichten dieses Gebietes. – *Zeitschrift der Deutschen geologischen Gesellschaft*, **36**, 277–378, Berlin.

ZOBODAT - www.zobodat.at

Zoologisch-Botanische Datenbank/Zoological-Botanical Database

Digitale Literatur/Digital Literature

Zeitschrift/Journal: [Abhandlungen der Geologischen Bundesanstalt in Wien](#)

Jahr/Year: 2015

Band/Volume: [69](#)

Autor(en)/Author(s): Pohler Susanne M.L., Bandel Klaus, Kido Erika, Pondrelli Monica, Schönlaub Hans-Peter, Simonetto Luca, Suttner Thomas

Artikel/Article: [Seewarte Formation 89-91](#)